



DEALER WORKBOOK EN

2024

# ADVENTURE PARKS





## SMART BELAY X | MODULAR SYSTEM

With our modular elements, the Smart Belay X can be individually adapted to the needs of your park.



76035  
Smart Belay X



TRIANGLE

Zertifizierung  
EN 12275, EN 362

N°. 88294



CUPID

Zertifizierung  
EN 362

N°. 88218



CUPID SWIVEL

Zertifizierung  
PPE-R/11.135

N°. 84015



TIE IN LOOP S  
25 CM / 35 CM

Zertifizierung  
EN 566

N°. 76010

76035

## Smart Belay X

	85 CM
blue 300	
Weight	1400g

Certified according to EN 17109 (class D)! The Smart Belay X is a redesign of our legendary Smart Belay - now with innovative magnetic technology for continuous safety and maximum freedom of movement in your high ropes course. Certified according to EN 17109 (class D).


### Features

- Quick registration and effective management thanks to RFID technology
- communicating, interconnected pulley carabiners prevent accidental detachment from the safety cable
- safety lock with magnet technology for maximum security and protection against careless use
- intuitive operation even for children
- steel pulleys integrated in the carabiner for use on zip lines replace the double pulley
- PILOT BAR minimizes the risk of strangulation and provides support for difficult elements in the course
- modular system allows the use of different connectors and different lengths of tie-in loops
- quick and easy evacuation made possible by opener or steel carabiner (not included in delivery)
- SBX HOLSTER included

### Technical information

- **Certification** EN 17109 (Class D)

### Technologies



blue 300

## LANYARDS | ACCESSORIES



88218  
**Cupid**



84015  
**Cupid Swivel**



88294  
**Triangle**



73806  
**Screwlink 8mm II**



73798  
**Screwlink 10mm**



76037  
**Smart Belay Einbindeschlaufe**



76041  
**Smart Belay X O-Ring**



76029  
**Pilot Bar**



76044  
**SBX Holster**



84024  
**Shockstop Pro 140**



88291  
**Steel HMS Screw**



85212  
**Triangle Captive**



76054  
**Smart Belay X Servicetool**



76019  
**Drehmomentschlüssel 4-20 Nm**



76042  
**Smart Belay X Opener**



88283  
**Switch Pro Y-Static**

88218

## Cupid



	000
night 017	
oasis 138	
Weight	65g

Openable ring in accordance with EN 362-M for permanently connecting load-bearing equipment elements in any direction. The CUPID is designed with a single screw and no additional individual parts. The screw is never loaded along its axis and the ring remains closed under load even if the screw is lost. The opening width of 12 mm makes installing rope terminations, slings, and metal components easy.

### Features

- Opening width: 12 mm
- Inside diameter: 44 mm

### Technical information

- **Certification** EN 362
- **Material** Aluminium
- **Gate opening** 12 mm
- **Minimum breaking strength** 20 kN



night 017



oasis 138

84015

## Cupid Swivel



	000
night-oasis 219	
Weight	105g

With no unnecessary loose parts that can get lost, the ability to be opened and closed as often as users desire, and a design that makes it the lightest and most compact swivel in its class, the CUPID SWIVEL is a dream come true for any PPE system! The innovative integrated mechanical screw locking system enables the device to be repeatedly opened and closed without having to replace or manually secure screws, and reliably prevents the screw from opening of its own accord due to vibrations. The combination of a 12 mm opening width and the outward opening direction of the gate makes it easy to install rope terminals, slings, and metal components.

### Features

- Small, ball-bearing-mounted swivel rotates reliably even under high loads
- Size: 95 x 50 x 28 mm
- Inside diameter: 25 mm
- Opening width: 12 mm

### Technical information

- **Certification** PPE-R/11135
- **Material** Aluminium
- **Minimum breaking strength** 20 kN



night-oasis 219

88294

## Triangle



	000
silver 006	
Weight	85g

Certified triangle screw link for the most diverse fields of application, e.g. fixing a chest ascender on a chest harness.

### Features

- Triangle Captive: Locking device available as accessory

### Technical information

- **Certification** EN 12275  
EN 362
- **Material** Steel
- **Closure** Screw
- **Carabiner shape** Delta
- **Fmax. major axis** 27 kN
- **Fmax. open** 10 kN
- **Width** 56 mm
- **Length** 72 mm



silver 006

73806

**Screwlink 8mm II**

	000
silver 006	
Weight	77g

Certified oval steel screw link.

**Technical information**

- **Certification** EN 12275  
EN 362
- **Material** Steel
- **Closure** Screw
- **Carabiner shape** Oval
- **Fmax. major axis** 55 kN
- **Fmax. open** 35 kN
- **Fmax. minor axis** 10 kN
- **Width** 36 mm
- **Length** 73 mm



silver 006

73798

**Screwlink 10mm**

	000
silver 006	
Weight	137g

Certified oval steel screw link.

**Technical information**

- **Certification** EN 12275  
EN 362
- **Material** Steel
- **Closure** Screw
- **Carabiner shape** Oval
- **Fmax. major axis** 55 kN
- **Fmax. open** 35 kN
- **Fmax. minor axis** 10 kN
- **Width** 45 mm
- **Length** 90 mm



silver 006

76037

**Smart Belay Einbindeschlaufe**

	20 CM	35 CM
icemint 329		
oasis 138		
Weight		30g

Lightweight, fast connection of SMART BELAY X to a harness. Enables high degree of flexibility for exchanging used products on site, without requiring tools.

**Technical information**

- **Certification** EN 566
- **Material** 100% PES
- **Minimum breaking strength** 22 kN

**Technologies**

MADE IN GERMANY



icemint 329



oasis 138

76041

## Smart Belay X O-Ring



	85 MM
blue 300	
Weight	142g

O-ring for using the SMART BELAY X in vertical elements.

### Technical information

- **Certification** PPE-R/11.114
- **Material** Steel



blue 300

76029

## Pilot Bar

	000
night 017	
Weight	27g



PILOT BAR for support during the course and to ensure correct landing on the zip line.

### Features

- Simplifies self-rescue and loadable up to 120kg
- Minimises twisting of the lanyard arms
- Minimises risk of strangulation

### Technical information



night 017

76044

## SBX Holster

	000
night 017	
Weight	37g



Practical holding device for storing SMART BELAY X or SMART BELAY on RADIALIS and RADIALIS CLICK. Protects the device from dirt, dust and moisture during transport.

### Technical information

- **Material** PA



night 017

84024

## Shockstop Pro 140



	000
night 017	
Weight	133g

Compact shock absorber for the use in safety systems.

### Features

- Shock absorber extension: 160 cm
- High maximum load capacity (140 kg)
- Certified to the strict requirements of EN 355 and ANSI Z359.13 12 feet
- Approved for 60 - 140 kg

### Technical information

- **Certification** EN 355  
ANSI Z359.12
- **Minimum breaking strength** 15 kN

### Technologies

MADE IN GERMANY



night 017

88291

## Steel HMS Screw



	000
silver 006	
Weight	236g

HMS carabiner made of hardened steel for maximum protection. Ideal for top roping, outdoor centres, high ropes courses, climbing gyms or for other uses where a regular strain is placed on the carabiner.

### Features

- Keylock closure mechanism for optimum handling when clipping and unclipping
- Brass sleeve ensures optimum gate strength

### Technical information

- **Certification** EN 12275  
EN 362
- **Material** Steel
- **Closure** Screw
- **Carabiner shape** HMS
- **Fmax. major axis** 40 kN
- **Fmax. open** 15 kN
- **Fmax. minor axis** 15 kN
- **Width** 74 mm
- **Length** 110 mm
- **Gate opening** 23 mm



silver 006

85212

## Triangle Captive



	000
night 017	
Weight	12g

Simple protection against twisting and opening made of recycled polyamide for the TRIANGLE screw link. Suitable for the fixed connection between two lanyards or a lanyard and hardware components, such as the SMART BELAY X.

### Technical information

- **Material** PA recycled

### Technologies



night 017

76054

## Smart Belay X Servicetool

	000
silver 006	
Weight	770g



A special tool that simplifies regular inspections of the SMART BELAY X, even during ongoing activities. Easy to attach to the wall, it uses magnetic and non-magnetic elements to correctly perform a functional check of the locking mechanism prior to every use.

### Technical information



silver 006

76019

## Drehmomentschlüssel 4-20 Nm

	000
no color 000	
Weight	400g



EDELRID's torque wrench (4 - 20 Nm). Suitable to adjust the exact torque of all our products (SMART BELAY X, CUPID SWIVEL, CUPID) and for other fine adjustments.

### Technical information



no color 000

76042

## Smart Belay X Opener

	12 CM
black 010	
Weight	23g



Tool for quick and easy opening of the Smart Belay X e.g. in rescue situations.

### Technical information



black 010

88283

## Switch Pro Y-Static

	95 CM	110 CM
red 200		
Weight	500g	530g

Y-lanyard for self-belaying and positioning, eg. on high ropes courses. The asymmetric arms made of STATIC LOW STRETCH rope permit variable, situation-dependent use. Includes pre-assembled DSG 4000 STEEL carabiner on the longer arm.

### Features

- Thermo Shield treatment for pleasant handling
- Please note: must not be used as a via ferrata set
- Transparent stitching protection for easier inspection
- Highly robust kernmantle construction
- Two independent arms allow different positioning
- Is attached to the harness by means of a cow hitch

### Technical information

- **Certification** EN 354  
EN 795 Typ B
- **Minimum breaking strength** 22 kN

### Technologies

MADE IN GERMANY



## SMART BELAY X | TECHNOLOGY

### SMART BELAY X ULTIMATE SAFETY FOR HIGH-ROPE COURSES



The Smart Belay X is a redesign of our legendary Smart Belay – now with innovative magnetic technology for continuous safety and maximum freedom of movement in your high ropes course.

The heart of the Smart Belay X are the communicating, interconnected pulley carabiners. If one of the carabiners is opened, the opening mechanism of the other carabiner is automatically blocked. A new feature is the magnetic locking mechanism.

This turns the Smart Belay X into a safety system according to EN 17109 Category D. The opening mechanism of the Smart Belay X is only released by an integrated magnet after contact with the steel cable. Unintentionally unhooking of the system is not possible when used correctly. The advantage: more safety for the visitors, less risk for the operator.

Like its predecessor, the new Smart Belay X can be easily installed in all existing adventure parks without the need for costly modifications.



## SMART BELAY X | TECHNOLOGY

Even moving or vertical sections can be implemented without a problem and thanks to the modular system it can be adapted to all common safety cable heights. This allows the operator the greatest possible flexibility in the selection of exciting climbing elements for a creative park design.


The Smart Belay X allows the customer to climb on his/her own and due to its outstanding geometry and intuitive handling, it is also easy for children to use. Overtaking is also possible without any problems, thus avoiding annoying bottlenecks with long waiting times.

A further advantage is the steel pulley integrated in the carabiners. They are designed for use on zip lines and replace the double pulley. The integrated Pilot Bar minimizes the risk of strangulation and provides control and hold support for zip lines or difficult elements in the course.

An integrated RFID transponder (UHF) enables fast registration and effective management — an invaluable advantage not only in the rental business. For example, it is possible to monitor application cycles and/or the PPE status of the product. This saves both time and money as well as increasing safety in the rental business.

### HOW TO OPEN THE SMART BELAY X

Our new SMART BELAY X can be handled without our special opener SMART BELAY X OPENER tool by using a big HMS screw steel carabiner.

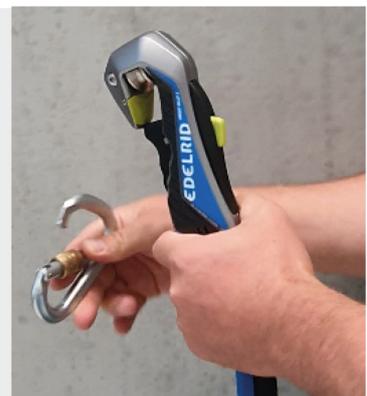



## HARNESSES



74925  
**Radialis Comp III**



74926  
**Radialis Comp Junior III**



74923  
**Radialis Air**



74924  
**Radialis Air Junior**



74332  
**Radialis Pro Adjust**



74908  
**Fraggie III**



74339  
**Additional Radialis  
Padding**



74347  
**Radialis Additional  
Gear Loop**

74925

## Radialis Comp III

	VARIO
night-oasis 219	
Weight	1076g



night-oasis 219

Classic webbing harness for use on high rope courses. The different colors of the shoulder, hip and leg straps make the harness intuitive to put on and enable trainers to check it quickly and reliably. The six Slide Block buckles and pull-on loops at the end of the webbing material enable the harness to be simply adjusted for an optimum fit. The labeling field and integrated RFID transponder can be used to personalize the harness and make it far easier to document its use.

### Features

- Stitched webbing terminations designed so that straps cannot be completely unthreaded
- Central D-ring for attaching a lanyard
- Integrated RFID transponder
- Adjustable back plate and elasticated bum straps (replaceable)
- Abrasion-resistant polyester straps with indicator threads
- Color-coded differentiation of the harness parts

### Technical information

- **Certification** EN 12277
- **max. leg loop circumference** 85 cm
- **min. leg loop circumference** 25 cm
- **max. waist size** 150 cm
- **min. waist size** 45 cm

### Technologies



74926

## Radialis Comp Junior III

	VARIO
night-icemint 749	
Weight	999g



night-icemint 749

Classic webbing harness for use on high rope courses. The different colors of the shoulder, hip and leg straps make the harness intuitive to put on and enable trainers to check it quickly and reliably. The six Slide Block buckles and pull-on loops at the end of the webbing material enable the harness to be simply adjusted for an optimum fit. The labeling field and integrated RFID transponder can be used to personalize the harness and make it far easier to document its use.

### Features

- Stitched webbing terminations designed so that straps cannot be completely unthreaded
- Central D-ring for attaching a lanyard
- Integrated RFID transponder
- Adjustable back plate and elasticated bum straps (replaceable)
- Abrasion-resistant polyester straps with indicator threads
- Color-coded differentiation of the harness parts

### Technical information

- **Certification** EN 12277
- **max. leg loop circumference** 65 cm
- **min. leg loop circumference** 25 cm
- **max. waist size** 110 cm
- **min. waist size** 45 cm

### Technologies



74923

## Radialis Air

	VARIO
night-oasis 219	
Weight	1350g

Easily adjustable and versatile full body harness for use on high rope courses. The different colors of the shoulder, hip and leg straps make the harness intuitive to put on and enable trainers to check it quickly and reliably. The eight Slide Block buckles enable the fit of the harness to be optimally adjusted for a wide range of user heights and sizes. Thanks to the dorsal eyelet certified to EN 361, the RADIALIS AIR offers an additional attachment point, for example for use with pamper pole elements. The labeling field and integrated RFID transponder can be used to personalize the harness and make it far easier to document its use.

### Features

- Stitched webbing terminations designed so that straps cannot be completely unthreaded
- Central D-ring for attaching a lanyard
- Integrated RFID transponder
- Abrasion-resistant polyester straps with indicator threads
- Color-coded differentiation of the harness parts
- Additional, dorsal eyelet for use with pamper pole elements
- Comfortable padding elements on the back and hips

### Technical information

- **Certification** EN 12277
- **Material** Polyester / Polyamide
- **max. leg loop circumference** 85 cm
- **min. leg loop circumference** 25 cm
- **max. waist size** 150 cm
- **min. waist size** 45 cm

### Technologies



night-oasis 219

74924

## Radialis Air Junior

	VARIO
night-icemint 749	
Weight	1239g

Easily adjustable and versatile full body harness for use on high rope courses. The different colors of the shoulder, hip and leg straps make the harness intuitive to put on and enable trainers to check it quickly and reliably. The eight Slide Block buckles enable the fit of the harness to be optimally adjusted for a wide range of user heights and sizes. Thanks to the dorsal eyelet certified to EN 361, the RADIALIS AIR offers an additional attachment point, for example for use with pamper pole elements. The labeling field and integrated RFID transponder can be used to personalize the harness and make it far easier to document its use.

### Features

- Stitched webbing terminations designed so that straps cannot be completely unthreaded
- Central D-ring for attaching a lanyard
- Integrated RFID transponder
- Abrasion-resistant polyester straps with indicator threads
- Color-coded differentiation of the harness parts
- Additional, dorsal eyelet for use with pamper pole elements
- Comfortable padding elements on the back and hips

### Technical information

- **Certification** EN 12277
- **Material** Polyester / Polyamide
- **max. leg loop circumference** 65 cm
- **min. leg loop circumference** 25 cm
- **max. waist size** 110 cm
- **min. waist size** 45 cm

### Technologies



night-icemint 749

74332

## Radialis Pro Adjust



	L-XL	XS-M
icemint 329		
oasis 138		
Weight	870g	

Innovative harness for high ropes courses and adventure parks. For maximum flexibility, the harness features five Easy Glider buckles. They provide a large adjustment range and allow a quick on and off of the harness.

### Features

- Different colors for easy size identification (icemint, oasis)
- Outer fabric is water-resistant, fast drying, easy to wipe clean and fully washable
- Center Fit Construction: Moveable waist padding for personalized fit and positioning
- Adjustable leg loops for optimum fit and full flexibility
- Small pouch on harness to accommodate an RFID tag
- Elasticated loops hold remainder of straps in place
- Integrated VCR strap on the chest band for attaching a SBX HOLSTER
- Central D-ring for attaching a lanyard
- Optimal, hanging storage by a special device on the back (toggle)

### Technical information

- **Certification** EN 12277 Typ A
- **Material** Polyester / Polyamide
- **UIAA** 1

### Technologies



oasis 138



icemint 329

74908

## Fraggle III



	XXS	XS
icemint 329		
Weight	271g	307g

With this padded full body harness even young climbers and little mountaineers weighing up to 40 kg can enjoy a scramble. The stiff construction with the fixed leg loops makes putting the harness on much easier, and thanks to the two Slide Block buckles, the harness is quickly adjusted to the right size. The two large tie-in loops offer enough space for two carabiners clipped in opposite directions (eg. for top-roping). What makes the FRAGGLE truly special is that as the child gets bigger, the tie-in point moves and the harness "grows" as well. Besides, the FRAGGLE is fully manufactured in compliance with the strict bluesign® system requirements, in order to protect the environment, and resources.

### Features

- 3D mesh padding and soft webbing edges offer optimum comfort
- Two Slide Block buckles for quick and easy harness adjustment
- Attachment point at the back for extra safety in steep terrain or while skiing
- Made of bluesign®-certified materials
- "Growing" construction for an optimal and secure fit
- The padding ensures that the harness is dimensionally stable and can therefore be put on and taken off particularly easily—even by the child itself
- Delivered in a useful sports bag

### Technical information

- **Certification** EN 12277 Typ B

### Technologies



icemint 329

74339

## Additional Radialis Padding



	000
night 017	
Weight	90g

Additional leg loop and/or shoulder padding for retrofitting into our RADIALIS harnesses. It is attached to the leg loops and/or shoulder straps of the harness by hook and loop fastener.

### Technical information



night 017

74347

## Radialis Additional Gear Loop

	VARIO
oasis 138	
Weight	10g

Additional gear loop for our RADIALIS harnesses. It is attached to the harness with a cow hitch and loop fastener. No PPE.

### Technical information

- **Material** Polyamide



oasis 138



## HARDSHELL HELMETS



72049  
**Ultralight III**



72050  
**Ultralight Junior III**

72049

## UltraLight III



	000
granita 278	
icemint 329	
night 017	
oasis 138	
orange 227	
red 200	
snow 047	
Weight	380g

Our popular classic has now been updated. The new ULTRALIGHT has a modern design, improved ventilation, and a new replaceable and washable head and chin strap. The extremely robust structure has been retained. The ultimate helmet for commercial facilities like climbing schools and adventure parks.

### Features

- Extremely robust and impact-resistant polypropylene shell
- Headlamp attachment option
- One size: fits a head circumference of 54–60 cm
- Fully adjustable, replaceable, and washable head and chin strap for optimum fit
- Various vents for continuous air exchange
- Comfortably padded carrying system with antibacterial webbing

### Technical information

- **Certification** EN 12492
- **Head size** 54 - 60
- **UIAA** 1



night 017



snow 047



oasis 138



red 200



orange 227



granita 278



icemint 329

72050

## UltraLight Junior III



	000
red 200	
snow 047	
Weight	380g

The Junior version of the ULTRALIGHT has also had a make-over. It provides the same outstanding protection as the ULTRALIGHT.

### Features

- Extremely robust and impact-resistant polypropylene shell
- Headlamp attachment option
- Fully adjustable, replaceable, and washable head and chin strap for optimum fit
- Various vents for continuous air exchange
- One size: fits a head circumference of 48–58 cm
- Comfortably padded carrying system with antibacterial webbing

### Technical information

- **Certification** EN 12492
- **Head size** 48 - 58
- **UIAA** 1



red 200



snow 047

## HELMETS | ACCESSORIES



72053  
**Ultralight Carrying System III**



72056  
**Ultralight Junior Carrying System III**



72054  
**Ultralight Padding III**



72055  
**Ultralight Junior Padding III**



72052  
**Ultralight Clip Set III**





night 017

72053

### Ultralight Carrying System III

	000
night 017	
Weight	100g

Attachment system for the ULTRALIGHT models, made with antibacterial webbing material.

#### Technical information

72056

### Ultralight Junior Carrying System III



night 017

	000
night 017	
Weight	130g

Attachment system for the ULTRALIGHT JUNIOR models, made with antibacterial webbing material.

#### Technical information

- **Head size** 48 - 58

72054

### Ultralight Padding III



night 017

	000
night 017	
Weight	30g

Replacement padding for the ULTRALIGHT models.

#### Technical information

72055

### Ultralight Junior Padding III

	000
night 017	
Weight	30g

Replacement padding for the ULTRALIGHT JUNIOR models.

#### Technical information



night 017

72052

### Ultralight Clip Set III

	000
night 017	
Weight	7g

Replacement clips for the ULTRALIGHT and ULTRALIGHT JUNIOR models.

#### Technical information



night 017



## RFID ACCESSORIES



88324  
RFID Rope Label



88326  
RFID Sticker



88328  
RFID Laundry Dot



88330  
RFID Zip-Tie

88324

## RFID Rope Label

	000
night 017	
Weight	16g



For equipping a rope with an RFID transponder and therefore a unique RFID serial number. The RFID ROPE LABEL should ideally be attached to the end of the rope, where it can also be read by a separate reading device. Package contents: 10 pcs.

### Features

- Unique identification can be detected by means of reader and RFID (UHF) technology and digitally linked to a product
- UHF frequency range of 860 – 960 MHz
- Transparent film protects the transponder against abrasion
- Suitable for all rope types and diameters

### Technical information

#### Technologies



night 017

88326

## RFID Sticker

	000
night 017	
Weight	20g



The EDLERID RFID STICKER was developed to retrofit helmets or products with a large contact surface with an RFID transponder. The RFID STICKER should be protected from abrasion and impact at the point of breakage. Package contents: 10 pcs.

### Features

- Unique identification can be detected by means of reader and RFID (UHF) technology and digitally linked to a product
- UHF frequency range of 860 – 960 MHz
- Attachment to large contact areas and smooth surfaces

### Technical information

- **Diameter** 30 mm

#### Technologies



night 017

88328

## RFID Laundry Dot

	000
night 017	
Weight	10g



The EDLERID RFID LAUNDRY DOT is ideal for products with an integrated pocket for storing the chip. It has a plastic sheath for optimum protection against impact and all weather conditions. Package contents: 10 pcs.

### Features

- Unique identification can be detected by means of reader and RFID (UHF) technology and digitally linked to a product
- UHF frequency range of 860 – 960 MHz
- Extremely robust and weather resistant therefore also well-suited for rental operations

### Technical information

- **Diameter** 14 mm

#### Technologies



night 017

88330

## RFID Zip-Tie

	000
night 017	
Weight	24g



The EDELRID RFID ZIP-TIE is our all-purpose option that can be attached to any kind of PPE made from any material. Package contents:10 pcs.

### Features

- Unique identification can be detected by means of reader and RFID (UHF) technology and digitally linked to a product
- UHF frequency range of 860 – 960 MHz
- Suitable for use with any materials and products
- Plastic sheath for optimum protection against impact and all weather conditions

### Technical information

### Technologies




night 017

## ACCESSORIES | SAFE DESCENT



88230  
**Safe Descent 9,8mm**



74936  
**Spare Bumstraps  
Radialis Comp**

## ACCESSORIES



89011  
**Grip Glove**

88230

## Safe Descent 9,8mm



	15 M	20 M	25 M	30 M	40 M	50 M	100 M	160 M
snow 047								
Weight	3900g	3900g	4600g	4900g	4600g	3500g	11500g	14500g

SAFE DESCENT is an innovative descender and rescue device with hoisting function - ideal for work at heights and emergency situations in adventure parks and on wind turbines. On request, the SAFE DESCENT is available at short notice in the standard lengths listed here. Special lengths are possible.

### Features

- Pre-assembled with 98 mm kernmantle rope with certified end connections and color coding at the ends of the rope
- Automatic backstop (ratchet system) for safe draining
- Approved for double occupancy
- Slip clutch against incorrect operation
- Optional backpack for storage and transport available (CANYONEER BAG 45)
- Two sewn-in DSG steel carabiners with a palm squeeze mechanism in the terminations

### Technical information

- **Certification** EN 1496:2006 / B  
EN 341:2011 /1A (100kg) 1B (200kg)
- **Descent Velocity** 0,8 m/s
- **Max. user weight** 200 kg
- **max. descent distance** 160 m
- **max. descent load** 200 kg
- **Lifting Capacity** 140 kg
- **Descent Load min.** 30 kg
- **Approved rope diameter** 9,8 mm

### Technologies


UNDERGRIP



snow 047

74936

## Spare Bumstraps Radialis Comp



	000
night 017	
Weight	20g

Spare Bumstraps for Radialis Comp and Radialis Junior

### Technical information



night 017

89011

## Grip Glove



	XS	S	M	L	XL
night 017					
Weight	240g	240g	240g	240g	240g

Sensitivity, grip, abrasion resistance and protection all in one—this is what the GRIP GLOVES offer. The lightweight all-round protective gloves are certified according to EN 388 and are manufactured free of harmful substances according to Standard 100 by OEKO-TEX®.

### Features

- Certified according to the EN 388 (4131X) standard
- Manufactured according to Standard 100 by OEKO-TEX®
- Sizes color-coded on wristband
- Breathable

### Technical information

- **Öko Tex Standard** 100



night 017

**GERMANY**

EDELRID GmbH & Co. KG  
Achener Weg 66  
88316 Isny im Allgäu, Germany  
Phone: +49 7562 981-0  
Fax: +49 7562 981-100  
customerservice@edelrid.de  
www.edelrid.com

EDELRID | Red Chili

You can find our worldwide distributors on our website  
[www.edelrid.com](http://www.edelrid.com)

