



ENGLISH

# ADVENTURE PARKS

EDELRID

DEALER WORKBOOK | 2026



# INDEX

LANYARDS	3
HARNESSES	14
HELMETS	20
ACCESSORIES	25

# LANYARDS

## SMART BELAY X

✓ safety lock with magnet technology for maximum security and protection against careless use

✓ communicating, interconnected pulley carabiners prevent accidental detachment from the safety cable

✓ steel pulleys integrated in the carabiner for use on zip lines replace the double pulley



## LANYARDS



76035  
Smart Belay X

## MODULAR SYSTEM

With our modular elements, the Smart Belay X can be individually adapted to the needs of your park.



SMART BELAY X



## EDELRID ACADEMY

Our SMART BELAY-X training programme includes safe use in the park and correct Bowden cable adjustment. Operators of large adventure parks also have the opportunity to be trained as 'masters' so that they can carry out annual servicing and repairs during the year independently.

76035

## Smart Belay X

ST

	85 CM
blue 300	
Weight	1400g

Certified according to EN 17109 (class D), the SMART BELAY X is a redesign of our legendary SMART BELAY - now with innovative magnetic technology for continuous safety and maximum freedom of movement in your high ropes course.

### Features

- Quick registration and effective management thanks to RFID technology
- communicating, interconnected pulley carabiners prevent accidental detachment from the safety cable
- safety lock with magnet technology for maximum security and protection against careless use
- intuitive operation even for children
- steel pulleys integrated in the carabiner for use on zip lines replace the double pulley
- PILOT BAR minimizes the risk of strangulation and provides support for difficult elements in the course
- modular system allows the use of different connectors and different lengths of tie-in loops
- quick and easy evacuation made possible by opener or steel carabiner (not included in delivery)
- SBX HOLSTER included

### Technical information

- **Certification** EN 17109 (Class D)
- **RFID**
- **Fair Wear**

### Technologies



blue 300

## LANYARDS | ACCESSORIES



88218  
**Cupid**



84015  
**Cupid Swivel**



88294  
**Triangle**



76037  
**Smart Belay  
Einbindeschlaufe**



85212  
**Triangle Captive**



76041  
**Smart Belay X O-Ring**



76029  
**Pilot Bar**



76044  
**SBX Holster**



88291  
**Steel HMS Screw**



73806  
**Screwlink 8mm II**



73798  
**Screwlink 10mm**



84024  
**Shockstop Pro 140**



88283  
**Switch Pro Y-Static**



73839  
**Screwlink 8mm  
Captive**



76042  
**Smart Belay X Opener**

88218

## Cupid

ST



	000
night 017	
oasis 138	
Weight	65g

Openable ring in accordance with EN 362-M for permanently connecting load-bearing equipment elements in any direction. The CUPID is designed with a single screw and no additional individual parts. The screw is never loaded along its axis and the ring remains closed under load even if the screw is lost. The opening width of 12 mm makes installing rope terminations, slings, and metal components easy.

### Features

- Opening width: 12 mm
- Inside diameter: 44 mm

### Technical information

- **Certification** EN 362
- **Material** Aluminium
- **Fmax. major axis** 20 kN
- **Fmax. minor axis** 20 kN
- **Width** 70 mm
- **Length** 70 mm
- **Gate opening** 12 mm



night 017



oasis 138

84015

## Cupid Swivel

ST



	000
night-oasis 219	
Weight	105g

With no unnecessary loose parts that can get lost, the ability to be opened and closed as often as users desire, and a design that makes it the lightest and most compact swivel in its class, the CUPID SWIVEL is a dream come true for any PPE system! The innovative integrated mechanical screw locking system enables the device to be repeatedly opened and closed without having to replace or manually secure screws, and reliably prevents the screw from opening of its own accord due to vibrations. The combination of a 12 mm opening width and the outward opening direction of the gate makes it easy to install rope terminals, slings, and metal components.

### Features

- Small, ball-bearing-mounted swivel rotates reliably even under high loads
- Size: 95 x 50 x 28 mm
- Inside diameter: 25 mm
- Opening width: 12 mm

### Technical information

- **Certification** PPE-R/11.135
- **Material** Aluminium
- **Swivel**
- **Minimum breaking strength** 20 kN



night-oasis 219

88294

## Triangle

ST



	000
silver 006	
Weight	85g

Certified triangle screw link for the most diverse fields of application, e.g. fixing a chest ascender on a chest harness.

### Features

- Triangle Captive: Locking device available as accessory

### Technical information

- **Certification** EN 12275  
EN 362
- **Material** Steel
- **Closure** Screw
- **Carabiner shape** Delta
- **Fmax. major axis** 27 kN
- **Fmax. open** 10 kN
- **Width** 56 mm
- **Length** 72 mm



silver 006

76037

**Smart Belay Einbindeschlaufe**

ST



	20 CM	35 CM
icemint 329	<del>X</del>	<del>X</del>
oasis 138	<del>X</del>	<del>X</del>
Weight	32g	30g

Lightweight, fast connection of SMART BELAY X to a harness. Enables high degree of flexibility for exchanging used products on site, without requiring tools.

**Technical information**

- **Certification** EN 566
- **Material** 100% PES
- **Made in Germany**
- **Fair Wear**
- **Minimum breaking strength** 22 kN

**Technologies****MADE IN GERMANY**

icemint 329



oasis 138

85212

**Triangle Captive**

ST



	000
night 017	
Weight	12g

Simple protection against twisting and opening made of recycled polyamide for the TRIANGLE screw link. Suitable for the fixed connection between two lanyards or a lanyard and hardware components, such as the SMART BELAY X.

**Technical information**

- **Material** PA recycled
- **Upcycling**
- **UIAA**

**Technologies**

night 017

76041

**Smart Belay X O-Ring**

ST



	85 MM
blue 300	
Weight	142g

O-ring for using the SMART BELAY X in vertical elements.

**Technical information**

- **Certification** PPE-R/11.114
- **Material** Steel



blue 300

76029

## Pilot Bar

ST

	000
night 017	
Weight	27g



PILOT BAR for support during the course and to ensure correct landing on the zip line.

### Features

- Simplifies self-rescue and loadable up to 120kg
- Minimises twisting of the lanyard arms
- Minimises risk of strangulation

### Technical information

- **Fair Wear**

### Technologies



night 017



76044

## SBX Holster

ST

	000
night 017	
Weight	37g



Practical holding device for storing SMART BELAY X or SMART BELAY on RADIALIS and RADIALIS CLICK. Protects the device from dirt, dust and moisture during transport.

### Technical information

- **Material** PA
- **Fair Wear**

### Technologies



night 017



88291

## Steel HMS Screw

ST

	000
silver 006	
Weight	236g



HMS carabiner made of hardened steel for maximum protection. Ideal for top roping, outdoor centres, high ropes courses, climbing gyms or for other uses where a regular strain is placed on the carabiner.

### Features

- Keylock closure mechanism for optimum handling when clipping and unclipping
- Brass sleeve ensures optimum gate strength

### Technical information

- **Certification** EN 12275  
EN 362  
UIAA 121
- **Material** Steel
- **Closure** Screw
- **Carabiner shape** HMS
- **Fmax. major axis** 40 kN
- **Fmax. open** 15 kN
- **Fmax. minor axis** 15 kN
- **Width** 74 mm
- **Length** 110 mm
- **Gate opening** 23 mm



silver 006



silver 006

73806

### Screwlink 8mm II

ST

	000
silver 006	
Weight	77g

Certified oval steel screw link.

#### Technical information

- **Certification** EN 12275  
EN 362
- **Material** Steel
- **Closure** Screw
- **Carabiner shape** Oval
- **Fmax. major axis** 55 kN
- **Fmax. open** 35 kN
- **Fmax. minor axis** 10 kN
- **Width** 36 mm
- **Length** 73 mm



silver 006

73798

### Screwlink 10mm

ST

	000
silver 006	
Weight	137g

Certified oval steel screw link.

#### Technical information

- **Certification** EN 12275  
EN 362
- **Material** Steel
- **Closure** Screw
- **Carabiner shape** Oval
- **Fmax. major axis** 55 kN
- **Fmax. open** 35 kN
- **Fmax. minor axis** 10 kN
- **Width** 45 mm
- **Length** 90 mm



night 017

84024

### Shockstop Pro 140

ST

	000
night 017	
Weight	133g

Compact shock absorber for use in fall arrest systems that form part of personal fall protection equipment.

#### Features

- Shock absorber extension: 160 cm
- High maximum load capacity (140 kg)
- Certified to the strict requirements of EN 355 and ANSI Z359.13 12 feet
- Approved for 60 - 140 kg

#### Technical information

- **Certification** EN 355  
ANSI Z359.12
- **Made in Germany**
- **Fair Wear**
- **Minimum breaking strength** 15 kN

#### Technologies

MADE IN GERMANY





88283

## Switch Pro Y-Static

ST

	95 CM	110 CM
red 200		
Weight	500g	530g

Y-lanyard for self-belaying and positioning, e.g. on high ropes courses. The asymmetric arms made of STATIC LOW STRETCH 11 MM rope permit variable, situation-dependent use. Includes pre-assembled DSG 4000 STEEL carabiner on the longer arm.

### Features

- Thermo Shield treatment for pleasant handling
- Please note: must not be used as a via ferrata set
- Transparent stitching protection for easier inspection
- Highly robust kernmantle construction
- Two independent arms allow different positioning
- Is attached to the harness by means of a cow hitch

### Technical information

- **Certification** EN 354  
EN 795 Typ B
- **Made in Germany**
- **Minimum breaking strength** 22 kN

### Technologies

MADE IN GERMANY



red 200

73839

## Screwlink 8mm Captive

V10

	000
night 017	
Weight	40g

The SCREWLINK CAPTIVE is a simple anti-twist protector for our SCREWLINK steel screw links that also prevents accidental opening. It is made from a mixture of polyamide and fiberglass, whereby the polyamide content stems from recycled leftover rope from our in-house production facilities.

### Features

- Anti-twist and opening protection
- Compatible with Screwlink Captives 8 mm
- Materials: recycled polyamide and fiberglass

### Technical information

- **Certification** UIAA 121
- **Material** Main fabric: 100 % Polyamide
- **Captive**



night 017

76042

## Smart Belay X Opener

ST

	12 CM
black 010	
Weight	23g

Tool for quick and easy opening of the Smart Belay X e.g. in rescue situations.



black 010

## LANYARDS | ACCESSORIES



84028  
**Spare Screw Cupid Swivel**



84029  
**Spare Screw Cupid**



76054  
**Smart Belay X Servicetool**

84028

### Spare Screw Cupid Swivel

ST

	000
silver 006	
Weight	4g

Spare screw for the CUPID SWIVEL.



silver 006

84029

### Spare Screw Cupid

ST

	000
silver 006	
Weight	2g

Spare screw for the CUPID.



silver 006

76054

### Smart Belay X Servicetool

ST

	000
silver 006	
Weight	770g

A special tool that simplifies regular inspections of the SMART BELAY X, even during ongoing activities. Easy to attach to the wall, it uses magnetic and non-magnetic elements to correctly perform a functional check of the locking mechanism prior to every use.



silver 006

# HARNESSES

## RADIALIS AIR

✓ Additional, dorsal eyelet for use with pamper pole elements

✓ Central D-ring for attaching a lanyard

✓ Abrasion-resistant polyester straps with indicator threads



## HARNESSES | PARTICIPANT HARNESSES



74925  
**Radialis Comp III**



74926  
**Radialis Comp Junior III**



74923  
**Radialis Air III**



74924  
**Radialis Air Junior**



82046  
**Radialis Pro Adjust**



74908  
**Fraggle III**



74936  
**Spare Bumstraps  
Radialis Comp**



74339  
**Additional Radialis  
Padding**



74347  
**Radialis Additional  
Gear Loop**



82043  
**Spare Bumstraps  
Radialis Pro Adjust**

74925

**Radialis Comp III**

ST



	VARIO
night-oasis 219	
Weight	1076g

Classic webbing harness for use on high rope courses. The different colors of the shoulder, hip and leg straps make the harness intuitive to put on and enable trainers to check it quickly and reliably. The six Slide Block buckles and pull-on loops at the end of the webbing material enable the harness to be simply adjusted for an optimum fit. The labeling field and integrated RFID transponder can be used to personalize the harness and make it far easier to document its use.

**Features**

- Central D-ring for attaching a lanyard
- Integrated RFID transponder
- Adjustable back plate and elasticated bum straps (replaceable)
- Abrasion-resistant polyester straps with indicator threads
- Color-coded differentiation of the harness parts

**Technical information**

- **Certification** EN 12277  
UIAA 105
- **NFC**
- **Indicator**
- **Fair Wear**
- **max. leg loop circumference** 85 cm
- **min. leg loop circumference** 25 cm
- **max. waist size** 150 cm
- **min. waist size** 45 cm

**Technologies**

night-oasis 219

74926

**Radialis Comp Junior III**

ST



	VARIO
night-icemint 749	
Weight	999g

Classic webbing harness for use on high rope courses. The different colors of the shoulder, hip and leg straps make the harness intuitive to put on and enable trainers to check it quickly and reliably. The six Slide Block buckles and pull-on loops at the end of the webbing material enable the harness to be simply adjusted for an optimum fit. The labeling field and integrated RFID transponder can be used to personalize the harness and make it far easier to document its use.

**Features**

- Central D-ring for attaching a lanyard
- Integrated RFID transponder
- Adjustable back plate and elasticated bum straps (replaceable)
- Abrasion-resistant polyester straps with indicator threads
- Color-coded differentiation of the harness parts

**Technical information**

- **Certification** EN 12277  
UIAA 105
- **NFC**
- **Indicator**
- **Fair Wear**
- **max. leg loop circumference** 65 cm
- **min. leg loop circumference** 25 cm
- **max. waist size** 110 cm
- **min. waist size** 45 cm

**Technologies**

night-icemint 749

74923

## Radialis Air

ST



night-oasis 219

	VARIO
night-oasis 219	
Weight	1350g

Easily adjustable and versatile full body harness for use on high rope courses. The different colors of the shoulder, hip and leg straps make the harness intuitive to put on and enable trainers to check it quickly and reliably. The eight Slide Block buckles enable the fit of the harness to be optimally adjusted for a wide range of user heights and sizes. Thanks to the dorsal eyelet certified to EN 361, the RADIALIS AIR offers an additional attachment point, for example for use with pamper pole elements. The labeling field and integrated RFID transponder can be used to personalize the harness and make it far easier to document its use.

### Features

- Central D-ring for attaching a lanyard
- Integrated RFID transponder
- Abrasion-resistant polyester straps with indicator threads
- Color-coded differentiation of the harness parts
- Additional, dorsal eyelet for use with pamper pole elements
- Comfortable padding elements on the back and hips

### Technical information

- **Certification** EN 12277  
UIAA 105
- **Material** Polyester / Polyamide
- **NFC**
- **Indicator**
- **Fair Wear**
- **max. leg loop circumference** 85 cm
- **min. leg loop circumference** 25 cm
- **max. waist size** 150 cm
- **min. waist size** 45 cm

### Technologies



74924

## Radialis Air Junior

ST



night-icemint 749

	VARIO
night-icemint 749	
Weight	1239g

Easily adjustable and versatile full body harness for use on high rope courses. The different colors of the shoulder, hip and leg straps make the harness intuitive to put on and enable trainers to check it quickly and reliably. The eight Slide Block buckles enable the fit of the harness to be optimally adjusted for a wide range of user heights and sizes. Thanks to the dorsal eyelet certified to EN 361, the RADIALIS AIR offers an additional attachment point, for example for use with pamper pole elements. The labeling field and integrated RFID transponder can be used to personalize the harness and make it far easier to document its use.

### Features

- Central D-ring for attaching a lanyard
- Integrated RFID transponder
- Abrasion-resistant polyester straps with indicator threads
- Color-coded differentiation of the harness parts
- Additional, dorsal eyelet for use with pamper pole elements
- Comfortable padding elements on the back and hips

### Technical information

- **Certification** EN 12277  
UIAA 105
- **Material** Polyester / Polyamide
- **NFC**
- **Indicator**
- **Fair Wear**
- **max. leg loop circumference** 65 cm
- **min. leg loop circumference** 25 cm
- **max. waist size** 110 cm
- **min. waist size** 45 cm

### Technologies





icemint 329



oasis 138

82046

## Radialis Pro Adjust

ST

	L-XL	XS-M
icemint 329	X	X
oasis 138	X	X
Weight	870000g	760000g

Innovative harness for high ropes courses and adventure parks. For maximum flexibility, the harness features five Easy Glider buckles. They provide a large adjustment range and allow a quick on and off of the harness.

### Features

- Different colors for easy size identification (icemint, oasis)
- Outer fabric is water-resistant, fast drying, easy to wipe clean and fully washable
- Adjustable leg loops for optimum fit and full flexibility
- Small pouch on harness to accommodate an RFID tag
- Elasticated loops hold remainder of straps in place
- Integrated VCR strap on the chest band for attaching a SBX HOLSTER
- Central D-ring for attaching a lanyard
- Optimal, hanging storage by a special device on the back (toggle)
- Center fit construction: sliding waist belt padding that can be centrally positioned enables optimum harness adjustment

### Technical information

- **Certification** EN 12277 Typ A  
UIAA 105
- **Material** Polyester / Polyamide
- **Fall Arrest Eyelet Front**
- **NFC**
- **Indicator**
- **Fair Wear**

### Technologies



icemint 329

74908

## Fraggle III

ST

	XXS	XS
icemint 329		
Weight	271g	307g

With this padded full body harness even young climbers and little mountaineers weighing up to 40 kg can enjoy a scramble. The stiff construction with the fixed leg loops makes putting the harness on much easier, and thanks to the two Slide Block buckles, the harness is quickly adjusted to the right size. The two large tie-in loops offer enough space for two carabiners clipped in opposite directions (e.g. for top-roping). What makes the FRAGGLE truly special is that as the child gets bigger, the tie-in point moves and the harness "grows" as well. Besides, the FRAGGLE is fully manufactured in compliance with the strict bluesign system requirements, in order to protect the environment, and resources.

### Features

- 3D mesh padding and soft webbing edges offer optimum comfort
- Two Slide Block buckles for quick and easy harness adjustment
- Attachment point at the back for extra safety in steep terrain or while skiing
- "Growing" construction for an optimal and secure fit
- The padding ensures that the harness is dimensionally stable and can therefore be put on and taken off particularly easily—even by the child itself
- Delivered in a useful sports bag
- bluesign PRODUCT

### Technical information

- **Certification** EN 12277 Typ B  
UIAA 105
- **Material** Polyamide
- **bluesign®**
- **UIAA**
- **Indicator**
- **Kids**
- **Fair Wear**

### Technologies





74936  
**Spare Bumstraps Radialis Comp**  
 PA

	000
night 017	
Weight	20g

Spare Bumstraps for RADIALIS COMP and RADIALIS COMP JUNIOR.

**Technical information**

- Fair Wear

**Technologies**



night 017



74339  
**Additional Radialis Padding**  
 V10

	000
night 017	
Weight	90g

Additional leg loop and/or shoulder padding for retrofitting into our RADIALIS harnesses. It is attached to the leg loops and/or shoulder straps of the harness by hook and loop fastener.

**Technical information**

- Fair Wear

**Technologies**



night 017



74347  
**Radialis Additional Gear Loop**  
 V5

	VARIO
oasis 138	
Weight	10g

Additional gear loop for our RADIALIS harnesses. It is attached to the harness with a cow hitch and loop fastener. No PPE.

**Technical information**

- Material Polyamide
- Fair Wear

**Technologies**



oasis 138

82043

## Spare Bumstraps Radialis Pro Adjust

PA

	ONE SIZE
night 017	

Elasticated strap for use as a spare leg loop strap for the RADIALIS PRO ADJUST harness for high ropes courses and adventure parks.



night 017

# HELMETS

## ULTRALIGHT

✓ Extremely robust and impact-resistant polypropylene shell

✓ Fully adjustable, replaceable, and washable head and chin strap for optimum fit



✓ One size: fits a head circumference of 54–60 cm

## HELMETS | HARDSHELL



72049  
**Ultralight III**



72050  
**Ultralight Junior III**

## ACCESSORIES



72053  
**Ultralight Carrying System III**



72056  
**Ultralight Junior Carrying System III**



72054  
**Ultralight Padding III**



72055  
**Ultralight Junior Padding III**



72052  
**Ultralight Clip Set III**



72049

## Ultralight III

ST

	000
granita 278	
icemint 329	
night 017	
oasis 138	
orange 227	
red 200	
snow 047	
Weight	380g

Our popular classic has now been updated. The new ULTRALIGHT has a modern design, improved ventilation, and a new replaceable and washable head and chin strap. The extremely robust structure has been retained. The ultimate helmet for commercial facilities like climbing schools and adventure parks.

### Features

- Extremely robust and impact-resistant polypropylene shell
- Headlamp attachment option
- One size: fits a head circumference of 54–60 cm
- Fully adjustable, replaceable, and washable head and chin strap for optimum fit
- Various vents for continuous air exchange
- Comfortably padded carrying system with antibacterial webbing

### Technical information

- **Certification** EN 12492  
UIAA 106
- **Material** EPS, Polypropylen, Polamide, PU leather
- **Head size** 54 - 60



granita 278



icemint 329



night 017



oasis 138



orange 227



red 200



snow 047

72050

## Ultralight Junior III

ST



	000
icemint 329	
red 200	
snow 047	
Weight	380g

The Junior version of the ULTRALIGHT has also had a make-over. It provides the same features as the ULTRALIGHT.

### Features

- Extremely robust and impact-resistant polypropylene shell
- Headlamp attachment option
- Fully adjustable, replaceable, and washable head and chin strap for optimum fit
- Various vents for continuous air exchange
- One size: fits a head circumference of 48–58 cm
- Comfortably padded carrying system with antibacterial webbing

### Technical information

- **Certification** EN 12492  
UIAA 106
- **Material** EPS, Polypropylen, Polamide, PU leather
- **Head size** 48 - 58
- **UIAA**
- **Kids**



icemint 329



red 200



snow 047

72053

## Ultralight Carrying System III

ST

	000
night 017	
Weight	100g

Attachment system for the ULTRALIGHT models, made with antibacterial webbing material. Contains only the carrying system, replacement padding must be ordered separately.

### Technical information

- **Material** Polyamide



night 017

72056

## Ultralight Junior Carrying System III

ST

	000
night 017	
Weight	130g

Attachment system for the ULTRALIGHT JUNIOR models, made with antibacterial webbing material. Contains only the carrying system, replacement padding must be ordered separately.

### Technical information

- **Material** Polyamide
- **Head size** 48 - 58
- **Kids**



night 017

72054

## Ultralight Padding III

ST

	000
night 017	
Weight	30g

Replacement padding for the ULTRALIGHT models.

### Technical information

- **Material** PU leather



night 017

72055

## Ultralight Junior Padding III

ST

	000
night 017	
Weight	30g



Replacement padding for the ULTRALIGHT JUNIOR models.

### Technical information

- **Material** PU leather
- **Kids**



night 017

72052

## Ultralight Clip Set III

ST

	000
night 017	
Weight	7g



Replacement clips for the ULTRALIGHT and ULTRALIGHT JUNIOR models.

### Technical information

- **Material** Polyamide



night 017

# ACCESSORIES

## SAFE DESCENT

✓ Pre-assembled with 9.8 mm kernmantle rope with certified end connections and color coding at the ends of the rope

✓ Automatic backstop (ratchet system) for safe draining

✓ Two sewn-in DSG steel carabiners with a palm squeeze mechanism in the terminations



## ACCESSORIES | SAFE DESCENT



88230  
**Safe Descent 9,8mm**

## ACCESSORIES



89011  
**Grip Glove**

88230

## Safe Descent 9,8mm

ST



snow 047

	15 M	20 M	25 M	30 M	40 M	50 M	100 M	160 M
snow 047								
Weight	3900g	3900g	4600g	4900g	4600g	6500g	11500g	14500g

SAFE DESCENT is an innovative descender and rescue device with hoisting function - ideal for work at heights and emergency situations in adventure parks and on wind turbines. On request, the SAFE DESCENT is available at short notice in the standard lengths listed here. Special lengths are possible.

### Features

- Pre-assembled with 9.8 mm kernmantle rope with certified end connections and color coding at the ends of the rope
- Automatic backstop (ratchet system) for safe draining
- Approved for double occupancy
- Slip clutch against incorrect operation
- Optional backpack for storage and transport available (CANYONEER BAG 45)
- Two sewn-in DSG steel carabiners with a palm squeeze mechanism in the terminations

### Technical information

- **Certification** EN 1496: 2006 / B  
EN 341: 2011 /1A (100kg) 1B (200kg)
- **Made in Germany**
- **Max. user weight** 200 kg
- **max. descent distance** 160 m
- **Approved rope diameter** 9,8 mm

### Technologies

**MADE IN GERMANY**

89011

## Grip Glove

V6



nlight 017

	XS	S	M	L	XL
nlight 017					
Weight	240g	240g	240g	240g	240g

Sensitivity, grip, abrasion resistance and protection all in one—this is what the GRIP GLOVES offer. The lightweight all-round protective gloves are certified according to EN 388 and are manufactured free of harmful substances according to Standard 100 by OEKO-TEX®.

### Features

- Certified according to the EN 388 (4131X) standard
- Manufactured according to Standard 100 by OEKO-TEX®
- Sizes color-coded on wristband
- Breathable
- 6 pieces per sales unit (V6)

### Technical information

- **Stretch**
- **Fair Wear**
- **Öko Tex Standard** 100

### Technologies






ENGLISH

# TECHNOLOGIES

EDELRID

ADVENTURE PARKS | 2026

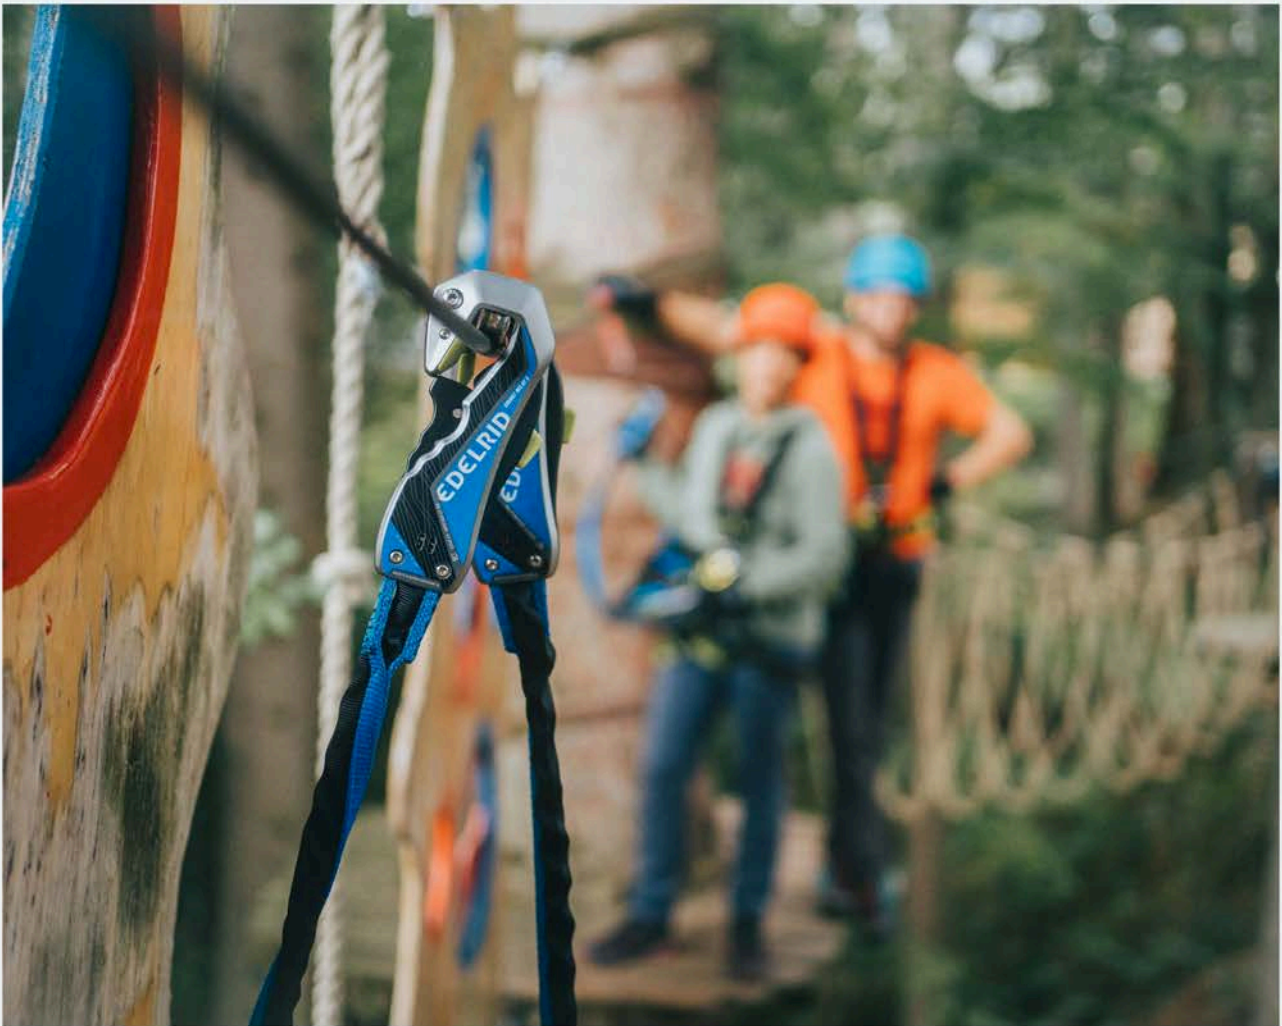

## SMART BELAY X | TECHNOLOGY

### SMART BELAY X ULTIMATE SAFETY FOR HIGH-ROPE COURSES



The Smart Belay X is a redesign of our legendary Smart Belay – now with innovative magnetic technology for continuous safety and maximum freedom of movement in your high ropes course.

The heart of the Smart Belay X are the communicating, interconnected pulley carabiners. If one of the carabiners is opened, the opening mechanism of the other carabiner is automatically blocked. A new feature is the magnetic locking mechanism.

This turns the Smart Belay X into a safety system according to EN 17109 Category D. The opening mechanism of the Smart Belay X is only released by an integrated magnet after contact with the steel cable. Unintentionally unhooking of the system is not possible when used correctly. The advantage: more safety for the visitors, less risk for the operator.

Like its predecessor, the new Smart Belay X can be easily installed in all existing adventure parks without the need for costly modifications.



## SMART BELAY X | TECHNOLOGY

Even moving or vertical sections can be implemented without a problem and thanks to the modular system it can be adapted to all common safety cable heights. This allows the operator the greatest possible flexibility in the selection of exciting climbing elements for a creative park design.


The Smart Belay X allows the customer to climb on his/her own and due to its outstanding geometry and intuitive handling, it is also easy for children to use. Overtaking is also possible without any problems, thus avoiding annoying bottlenecks with long waiting times.

A further advantage is the steel pulley integrated in the carabiners. They are designed for use on zip lines and replace the double pulley. The integrated Pilot Bar minimizes the risk of strangulation and provides control and hold support for zip lines or difficult elements in the course.

An integrated RFID transponder (UHF) enables fast registration and effective management — an invaluable advantage not only in the rental business. For example, it is possible to monitor application cycles and/or the PPE status of the product. This saves both time and money as well as increasing safety in the rental business.

### HOW TO OPEN THE SMART BELAY X

Our new SMART BELAY X can be handled without our special opener SMART BELAY X OPENER tool by using a big HMS screw steel carabiner.

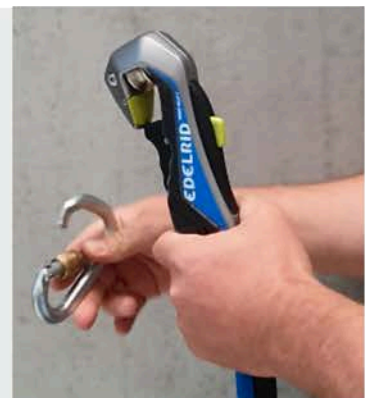

**EDELRID GmbH & Co. KG**

Achener Weg 66  
88316 Isny im Allgäu, Germany  
Phone: +49 7562 981-0  
customerservice@edelrid.de  
www.edelrid.com



**EDELRID**